

Suite 600 - 2889 E 12th Ave Vancouver, BC V5M 4T5

Toll Free: 1-866-566-7233 www.technicalsafetybc.ca

TECHNICAL STANDARDS & SAFETY AUTHORITY 345 CARLINGVIEW DRIVE TORONTO ON M9W 6N9

Date: April 24, 2019

Account #: 35231 **Journal #:** 73062

Attn: TANYA FRANCIS

Re: Application for Design Registration

The design, as detailed in your, SS-FITTING-2018, Job #2456218, for a Fitting is accepted for registration as

follows:

Registered To: SWAGELOK COMPANY CRN: 0A21025.51

Drawing #: Scope of Registration **Drawing Revision:** N/A

This design was registered based on a technical review performed by the province of initial registration in accordance with the Association of Chief Inspectors policy on reciprocal recognition of design review.

Reviewer's Notes:

As required by CSA B51 4.2.1, this registration expires on 24-Jan-2029. This CRN is valid until the expiry date as long as the Manufacturer maintains a valid quality control program verified by an acceptable third-party agency until that date. Should the certification of the quality control program lapse before the expiry date, this registration shall become void. Any additional conditions of registration stated in TSSA CRN# 0A21025.5 registration shall apply to BC registration.

Contact me if you have any questions. The invoice for registration will be forwarded under separate cover.

Janina Mihailescu

janina.mihailescu@technicalsafetybc.ca Design Administration

cc:

(PROD) 30400-20 GST #: 87391 2802 RT0001



Technical Standards and Safety Authority 345 Carlingview Drive Toronto, Ontario M9W 6N9 www.tssa.org

Show facsimile of manufacturer's logo or trademark, as it will appear on the fitting, in the space below

Swagelok

STATUTORY DECLARATION Registration of Fittings							
Joel Feldman, Vice President of Engineering							
(Name and Position, e.g. President, Plant Manager, Chief	Engineer)	7:					
of Swagelok Company							
(Name of Manufacturer)							
Located at 29500 Solon Road, Solon, Ohio 44139 USA	(440) 248-4600	(440) 349-5970					
(Plant Address)	(Telephone No.)	(Fax No.)					
do solemnly declare that the fittings listed hereunder, which are subject to the <i>Technical Standards and Safety Act</i> , Boilers and Pressure Vessels Regulation, comply with all of the requirements of ASME B31.1 for unlisted components, and ASME B31.3 for unlisted components							
(Title of recognized North American Standard) which specifies the dimensions, materials of construction, pressure/temperature ratings, identification marking the fittings and service;							
or are not covered by the provisions of a recognized North American standard and are therefore manufactured to comply with as supported by the attached data which identifies the dimensions, material of construction, pressure/temperature ratings and the basis for such ratings, the marking of the fitting for identification and service.							
I further declare that the manufacture of these fittings is controlled by a quality system meeting the requirements ofWhich has been verified by the following authority,BSI							
The items covered by this declaration, for which I seek registration, are category A. Fittings		type fittings. In support of					
this application, the following information and/or test data are attached as follows: ISO 9001:2015 Certificate, Attachment A, Attachment B, Catalog Information and	other Support Docum	ents					
(drawings, calculations, test reports, etc.)	onic. 25pp						
Declared before me at Solon in the State of Ohio							
the 29th day of November AD 20 18.							
Commissioner for Oaths: Jamie L Ristau Resident Portage County Notary Public, State of Ohlo Ny Commission Expires: 03/06/2019 (Signature) (Signature of Declarer)							
(Signature)	(Signature of D	eciarei j					
FOR OFFICE USE ONLY To the best of my knowledge and belief, the application meets the requirements of the Technical Standards and Safety Act, Boilers and Pressure Vessels Regulation, and CSA Standard B51 and is accepted for registration in Category		Safety Grouns					
CRN: 0421025.5							
Registered by: Amir Hariri	CRICOA2	0.63.5					
Dated: 24, Jan, 2019	ZALITO	2010					
NOTE: This registration expires on: 24/ Jan, 2029 24/ Jan, 2019							

PV 09553 (06/16)

For Scope of Registration see Attachments A&B.



Date: November 22, 2018 Page 1 of 6

Attachment B. Scope of Registration for Swagelok Stainless Steel Tube Fittings (Category A)

Product Scope

This document represents the scope of Swagelok Stainless Steel Tube Fittings covered by this submission for CRN approval. These Swagelok Tube Fittings have been evaluated in accordance with ASME B31.3-2016 for unlisted components and ASME B31.1-2016 for unlisted components.

Summary Table

	Product Description or Series	Material (Standard)	Port Connections and	Maximum Allowable Working Pressure		Design Code
			Sizes	Up to 100°F	At maximum temperature	of Construction
		e Fittings hardware Adapter	Swagelok End Connection 1/16 - 2 inch (Fractional) 3mm - 50 mm (Metric)	See Table on Page 2	See Table on Page 2	ASME B31.3 (Unlisted Components) ASME B31.1 (Unlisted Components)
			NPT Male 1/16 - 2 inch	11000 - 3900 psig	6160-2184 psig** @1000°F (537°C)	Based on ASME B1.20.1 listed in Table 326.1 of B31.3 and Table 126.1 of B31.1
			NPT Female 1/16 - 2 inch	6700 - 3900 psig	3752-2184 psig** @1000°F (537°C)	
			ISO/BSP (parallel) - PR Male 1/8 - 1 inch	4568 - 2320 psig* (law limit 15"F)	4568 – 2320 psig @150°F (65°C)	ASME B31.3 (Unlisted Components) ASME B31.1 (Unlisted Components)
			ISO/BSP (parallel) - RP Male 1/8 - 1/2 inch	6700-2400 psig with copper gasket*	6700 – 2400 psig @400°F (204°C) with copper gasket*	
	Gaugeable Tube Fittings and Adapter Fittings		ISO/BSP (parallel) RS Male 1/8-1 inch	6500-2700 psig with FKM bonded gasket* (limit -20°F)	6500-2700 psig @400°F (204°C) with FKM bonded gasket*	
			ISO/BSP (parallel) RG Female 1/4 – 1/2 inch	4036 psig with copper gasket*	4036 psig @400°F (204°C) with copper gasket*	
			ISO-7 (tapered)(RT) Male 1/8 – 2 inch	11000 - 3900 psig	6160-2184 psig** @1000°F (537°C)	
			ISO-7 (tapered)(RT) Female 1/8 - 2 inch	6700 - 3900 psig	3752-2184 psig** @1000°F (537°C)	
			UN / UNF(SAE) Stud (ST) Male 1/8 - 2 inch	4568 - 1813 psig*	4568 - 1813 psig @400°F (204°C)	
HIS	IS IS PAR	PAR OF 21025-5	UN / UNF (SAE) Pos. (ST) Male 1/8 - 2 inch	4568 - 1450 psig*	4568 - 1450 psig @400°F (204°C)	
			Tube Socket Weld 1/8 – 1 inch	12500 – 5600 psig	7000 – 3136 psig @1000°F (537°C)	
Hers &	Pressure 1	(Courte	Male Pipe Weld 1/4 – 1 inch	10300 – 6000 psig	5768-3360 psig @1000°F (537°C)	ASME B36.10M
			Unified (UNJ) (AN) Male Straight 1/8 - 1 inch	10000 – 5000 psig	5650-2825 psig @1000°F (537°C)	
			Unified (UNJ) (AN) Male Shape 1/8 - 1 inch	10000 - 4100 psig	5650-2316 psig @1000°F (537°C)	
			Unified (UNJ) (AN) Female w/ Swivel Nut 1/8 - 1 inch	4500 - 2500 psig	2542-1412 psig @1000°F (537°C)	

Date: November 22, 2018 Page 2 of 6

Stainless Steel Swagelok Tube Fitting Pressure Rating Table

	Maximum Allowable Working Pressure		
Swagelok End Connection Size	Up to 100°F	At maximum temperature 1000°F (537°C)	
1/16 inch	12 000 psig	9 120 psig	
1/8 inch	10 900 psig	8 284 psig	
3/16 inch	10 200 psig	7 752 psig	
1/4 inch	10 200 psig	7 752 psig	
5/16 inch	8 000 psig	6 080 psig	
3/8 inch	7 500 psig	5 700 psig	
1/2 inch	6 700 psig	5 092 psig	
5/8 inch	6 000 psig	4 560 psig	
3/4 inch	5 800 psig	4 408 psig	
7/8 inch	4 800 psig	3 648 psig	
1 inch	4 700 psig	3 572 psig	
1 1/4 inch	4 800 psig	3 648 psig	
1 1/2 inch	4 900 psig	3 724 psig	
2 inch	3 600 psig	2 736 psig	
3 mm 🥃	670 bar	509 bar	
6 mm 🍃	710 bar	540 bar	
8 mm	520 bar	395 bar	
10 mm	580 bar	441 bar	
12 mm	470 bar	357 bar	
14 mm	430 bar	327 bar	
15 mm	400 bar	304 bar	
16 mm	400 bar	304 bar	
18 mm	370 bar	281 bar	
20 mm	380 bar	289 bar	
22 mm	340 bar	258 bar	
25 mm	320 bar	243 bar	
28 mm	330 bar	251 bar	
30 mm	310 bar	236 bar	
32 mm	330 bar	251 bar	
38 mm	310 bar	236 bar	
50 mm	270 bar	205 bar	

0A21025-5



Product Description

Swagelok Fittings are furnished in a variety of configurations and shapes (straight, elbow, tee or cross). Swagelok Fittings consist of at least one Swagelok End – a two-ferrule mechanical-grip design. The Swagelok end is a proprietary design, and the assembly consists of Swagelok body, nut, front and back ferrule (see detail). The table above, as well as the "Configurations" section, covers a variety of other end connections.

Date: November 22, 2018

Page 3 of 6







Date: November 22, 2018 Page 4 of 6

Configurations

1. Unions.

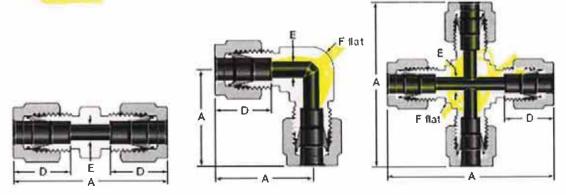


2. Male and Female connectors / adapters.

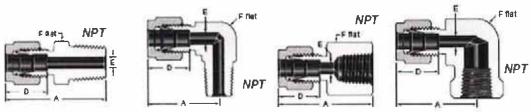


NPT Male Connectors

Female Connectors

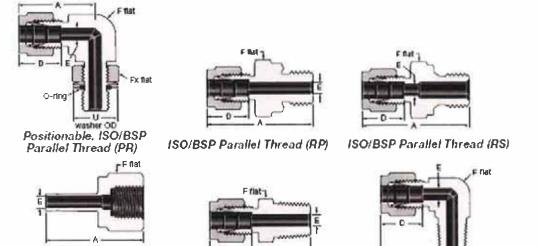


ISO/BSP Parallel Thread (RG, Gauge)

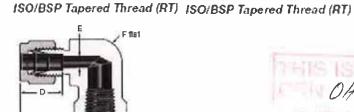



ISO/BSP Tapered Female Thread (RT)

ISO/BSP Tapered Female Thread (RT)












SAE/MS Straight Thread Stud (ST)




Positionable. SAE/MS Straight Thread (ST)




Tube Socket Weld



Tube Socket Weld



Male Pipe Weld



AN

F flat

37°

AN

AN Female

(For dimensions see catalog.)

OA21625.5



Product Options

The product options listed below affect pressure and/or temperature ratings shown in the above Summary Table, but in all cases the ratings are less than, or equal to, those shown in the table.

- 1. Bored-Through Fittings.
- 2. RP gaskets:
 - a. Copper
 - b. Nickel
 - c. PTFE
- 3. RS gaskets:
 - a. Metal-and-elastomer bonded
 - b. Non-bonded stainless steel
 - c. Copper
- 4. RG gaskets:
 - a. Copper
 - b. Nickel
 - c. PTFE
- 5. Sealant for tapered pipe threads (NPT and ISO-7):
 - a. Curable resin with PTFE
 - b. PTFE tape

Additional options that do not affect pressure and/or temperature ratings may be made available within the scope of this approval. Examples of these would include the following:

- 1. Special marking
- Special cleaning
 Wire drills
- 4. bulkhead configurations
- 5. Snubbers/frits and orifice plates
- 6. Equivalent metric or fractional hex sizes

All of the above options are within the scope of this approval.


Quality System

The Swagelok Company quality system complies with the requirements of ISO 9001:2015. The Swagelok Company maintains BSI Certificate of Registration Number FM 01729, which applies to all locations listed on the Certificate.

References

The product catalog does not represent the full scope of the registration but rather details some of the most common options.

- Gaugeable Tube Fittings and Adapter Fittings MS-01-140, Rev X
- Swagelok Tubing Data Sheet MS-01-107, Rev N



Date: November 22, 2018

Page 6 of 6

Attachment A. Swagelok Manufacturing Locations

This document lists the Swagelok locations where end item or component level manufacturing activities take place.

Swagelok Company 29500 Solon Road	Swagelok Company (Falon 1) 348 Bishop Road Highland Heights Ohio 44143
Solon, Ohio 44139	Highland Heights, Ohio 44143
USA	USA
Swagelok Company (Highland)	Swagelok Company (Falon 2)
318 Bishop Road	358 Bishop Road
Highland Heights, Ohio 44143	Highland Heights, Ohio 44143
USA	USA
Swagelok Company (OFC)	Swagelok Company (HPF)
29495 F.A. Lennon Drive	6050 Cochran Road
Solon, Ohio 44139	Solon, Ohio 44139
USA	USA
Swagelok Company (Atlantic)	Swagelok Company (Snow Metal)
26651 Curtiss Wright Parkway	6060 Cochran Road
Willoughby Hills, Ohio 44092	Solon, Ohio 44139
USA	USA
Swagelok Company (Micro) 26653 Curtiss Wright Parkway	Swagelok Company (Alfred)
Willoughby Hills, Ohio 44092	29500 Ambina Drive
USA	Solon, Ohio 44139
Swagelok Hose Services Company (SHSC)	Swagelok Company (Strongsville)
29900 Solon Industrial Parkway	15400 Foltz Road
Solon, Ohio 44139	Strongsville, Ohio 44119
Swagelok (China) Fluid System Technologies Ltd. Changshu Export Process Zone	Swagelok Company A.G. (European Technology Center)
Changshu Economic Development Zone	St. GallerstraBe 84
Changshu, Jiangshu	Lachen, Switzerland 8853
215513 China	Switzerland
Swagelok Limited Ballafletcher Road	
Tromode	
IM4 4RA Isle of Man	

